


Elite Dry Bath Incubator

The Elite dry bath incubator includes single and dual block modes, along with a competitive range of interchangeable blocks. It is designed for a variety of applications, including restriction digests, denaturing DNA, BUN, melting agar, coagulation studies, hybridization and Hot Start thermo-cycled reaction. Due to its advanced design, Elite dry bath is recognized as the finest, fastest temperature performance and smallest foot print dry bath incubator, in addition to being a mini water bath. Its temperature setting can be set in 0.1°C increments from 5°C above ambient to 150°C along with a timer shown on the LCD screen simultaneously. Optional Function Control software controls dry bath incubator and real time data recording through a PC for your specified requirement.

Features

- >Microprocessor control with digital performance for precise, accurate control
- >Wide temperature control range & great temperature controlled performance
- >Excellent temperature increasing rate
- >LCD screen shows timer and temperature simultaneously
- >User temperature calibration
- >Used as a water bath
- >Molded aluminum alloy chamber
- >Function Control software available



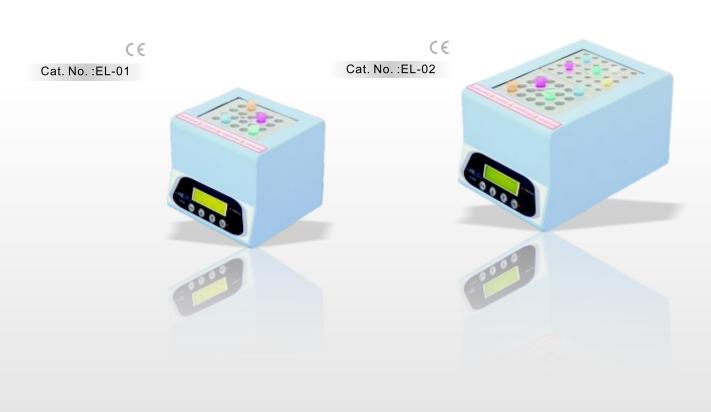

Specification	EL-01 (One Block)	EL-02 (Dual Block)	
Display	LCD Display		
Heating Power	125W	200W	
Unit Dimension (WxLxH)	152 x 150 x 135mm	152 x 230 x 135mm	
Controller	Digital microprocessor controller		
Heating Chamber	Molded aluminum alloy chamber		
Temperature Control Range	5°C above ambient to 150°C		
Temperature Increment	0.1°C		
Temperature Uniformity at 37°C	± 0.2°C		
Temperature Accuracy at 37°C	± 0.2°C		
Temperature Calibration	Yes		
Timer	Up to 99(hr): 59(min), continuous		
Safety Device	Leakage proof for heating chamber		
·	Over temperature protection		
	SSR failure detection		
Operating Temperature	Ambient to 40°C		
Special Feature	Used as water bath incubator		
Block Material	Aluminum alloy		
Block Type	Standard and customized type are available		
Data Log	RS 232		
Rated Voltage	110V or 220V		
Weight	approx. 2.1kg	approx. 2.8kg	



Ordering Information

•		
EL-01-110/220	Elite Dry Bath Incubator (single block unit); without block	
EL-02-110/220	Elite Dry Bath Incubator (dual block unit); without block	
MD-RS232	RS 232 cable	
MD-DLSW	Data Logging software package	
MD-PCSW	Function Control software package	
MD-DLSW-R	Data Logging software package, including a RS 232 cable	
MD-PCSW-R	Function Control software package, including a RS 232 cable	


Cat. No.:EL-01

- Temp. Set Value: 100°C

- Initial Temp. Value: 24 °C

Block Mode: MD-B0 .2

Process Time: approx. 23mins

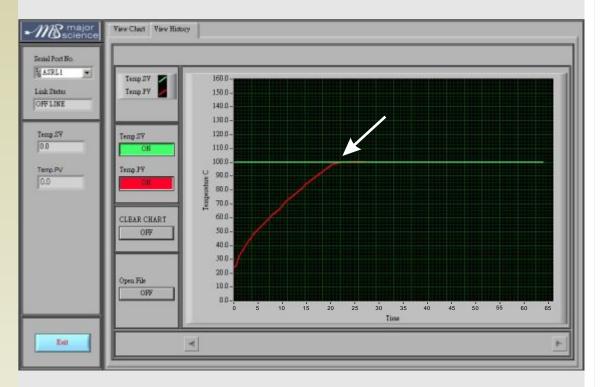


Cat. No. :EL-02

- Temp. Set Value: 100°C

- Initial Temp. Value: 27°C

Block Mode: MD-B0 .2

Process Time: approx. 24mins

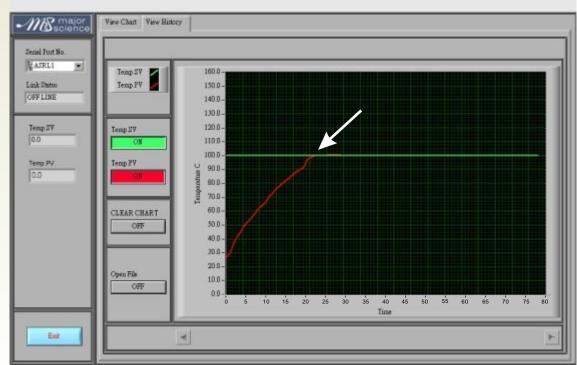



Dry Bath Blocks


Dry Bath Blocks are designed for Elite Dry Bath Incubator and Genius Dry Bath Incubator. The precision machined aluminum alloy blocks, which are suitable for microplate and different test tubes, range from 0.2ml tube to 50ml centrifuge tube, deliver efficient heat transfer. In addition to the standard blocks, customized blocks are also available for specified user requirement.

Specification

Block Material	Aluminum alloy	
Dimension (W x L x H)	79 x 104 x 50mm	
Block Lifter Well	Yes	
Thermometer Well	Yes (except microplate blocks)	


MD-MP01-S

For Microplate; Titerplate (Plain Block for Single Block unit only)




MD-MP01-D

For Microplate; Titerplate (Dual Block unit only)




MD-MP02-S

For 96 wells Deep Microplate or PCR plate (for Single Block unit only)

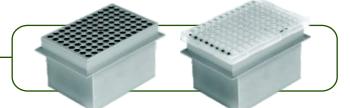


MD-MP02-D

For 96 wells Deep Microplate or PCR plate (for Dual Block unit only)




MD-B0.2


For 0.2ml tube, 64 wells (or 0.2ml PCR Strip tube for 8 wells x 8)

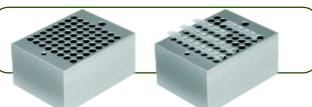

MD-B0.5

For 0.5ml tube, 20 wells

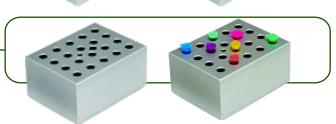

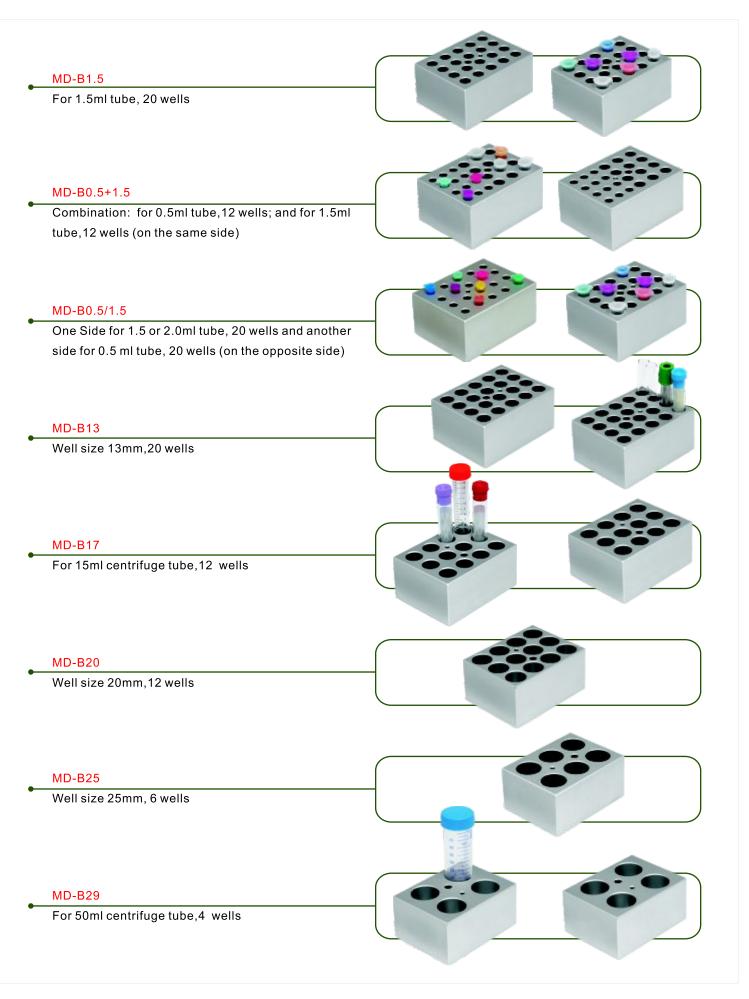



Contact Information

www.majorsci.com info@majorsci.com

19959 Sea Gull Way Saratoga, CA 95070 U.S.A

T/1-408-366-9866 F/1-408-446-1107

Innovative Life Sciences Tools